

## OPERATIONS MANUAL

# M-605

Please take the time to read these instructions before starting to use the scales



## Important Information

The M-605 hoist weighing scale should always be used under close supervision.

All slings and links should be visually inspected prior to use for signs of wear and tear, if any wear and tear is found then the effected items should be removed from use immediately.

It is vital that the user is competent to use the hoist weighing scale. It is the responsibility of the employer to ensure that adequate training is provided for the user.

We recommend a service interval of no more than 12 months.

Do not exceed the maximum rated capacity of the hoist scale – Max 200kg.

## Contents

<b>POWER SUPPLY</b> .....	3
<b>SPECIFICATIONS</b> .....	3
<b>MAINTENANCE AND GENERAL CARE</b> .....	3
<b>1.0 BASIC FUNCTIONS</b> .....	4
1.1 SWITCHING ON .....	4
1.2 SWITCHING OFF.....	5
1.3 SETTING ZERO.....	5
<b>2.0 ADVANCED FUNCTIONS</b> .....	6
2.1 HOLD FUNCTION.....	6
2.2 BODY MASS INDEX (BMI) FUNCTION.....	7
2.3 SETTING THE DATE AND TIME.....	8
2.4 PRINTING FUNCTION.....	9
<b>ROHS COMPLIANCE</b> .....	10
<b>ERROR MESSAGES</b> .....	11
<b>CONTACT DETAILS</b> .....	12

Thank you for purchasing a Marsden Professional Medical Scale. This is a precision Class III Weighing Instrument and it will reward considerate use with many years of accurate weighing results.

## Power Supply

- The INDICATOR uses a rechargeable pack, or an AC adaptor.
- When the indicator displays **Lo** (low battery indication), please plug in the AC adaptor for operation and battery recharging (where rechargeable batteries are installed).

## Product Specification

<b>MODEL</b>	M-605
<b>ACCURACY CLASS</b>	CLASS III
<b>CAPACITY</b>	200Kg
<b>INCREMENT</b>	100g
<b>BATTERY TYPE</b>	7.2V 2000mah
<b>MAINS ADAPTOR</b>	12V 2A
<b>UNIT WEIGHT</b>	6Kg


## Maintenance and General Care

- Repairs and Servicing should only be carried out by authorised service agents.
- There are no user serviceable parts in the weighing scale itself.
- The mains power adaptor fuses that are not accessible.
- When the adaptor is plugged into the mains supply a Green LED should illuminate to indicate that the adaptor is functioning correctly. If the LED does not illuminate then the scale should be checked by competent personnel.
- The weight indicator contains an internal rechargeable battery pack; this should only be replaced by authorised service agents. Under normal operating conditions the batteries should last for several years.
- We would recommend using alcohol based wipes or similar when cleaning the scales.
- Please do not use large amounts of water when cleaning the scales as this will cause damage to the scales electronics, you should also refrain from using corrosive liquids or high pressure washers.
- Always disconnect the scales from the mains power supply before cleaning.


# Operator Instructions

## Section 1 – Basic Functions


### 1.1 Switching on the scale

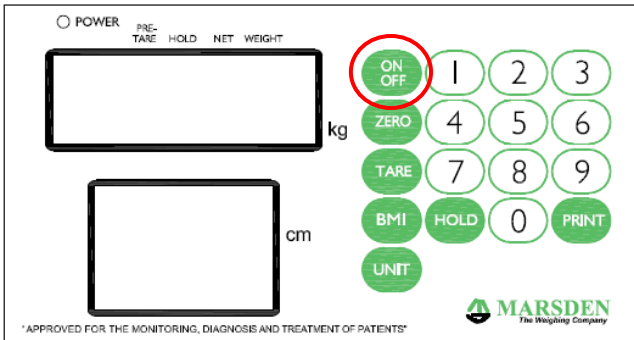


Press the ON button firmly.

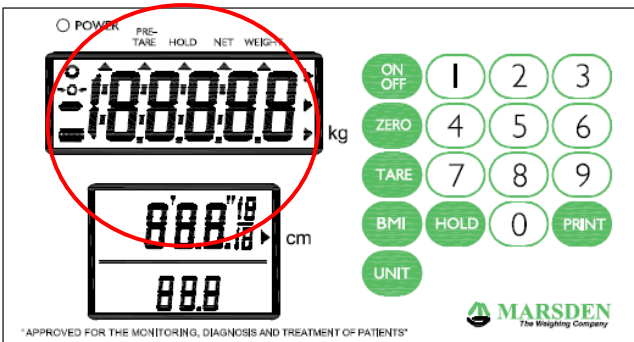

The scale will first test all of the display segments.

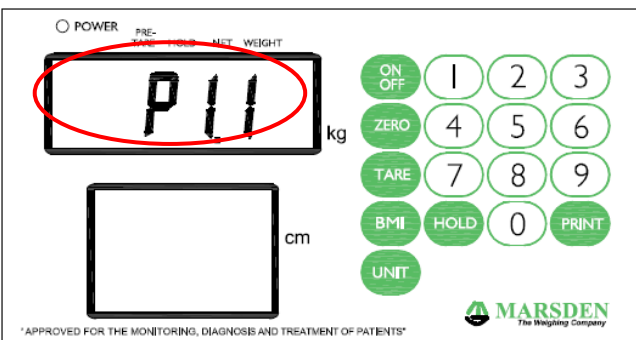


The scale will now show its current software version number.

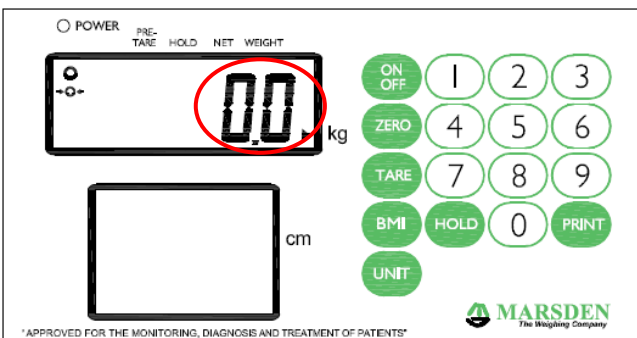


The scale will now go into weighing mode and should show 0.0kg on the display.

## 1.2 Switching off the scale

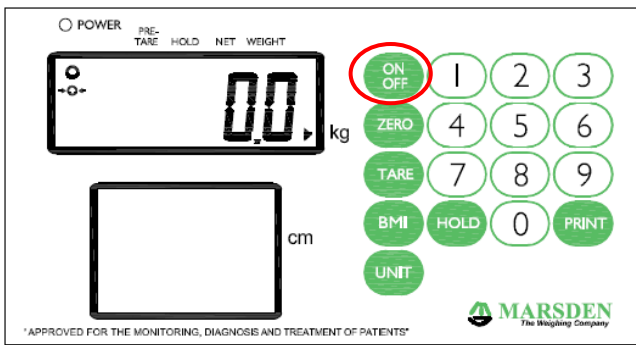


Press the OFF button.

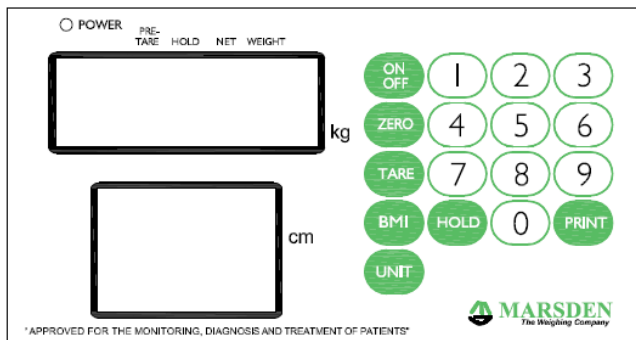


The scale will power down.

## 1.3 Setting the scale to zero

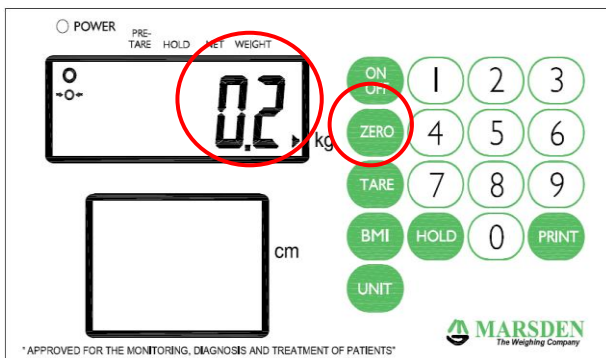

If for some reason the scale shows a reading other than 0.0kg then it can be reset to zero (2% of capacity).


Press the zero key once.

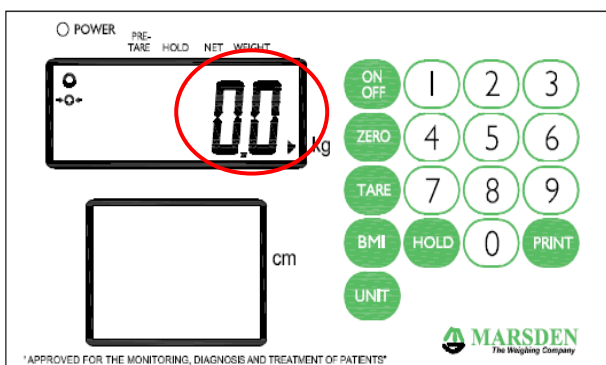


The scale will return to 0.0kg.

# Section 2 – Advanced Functions


## 2.1 Hold Function

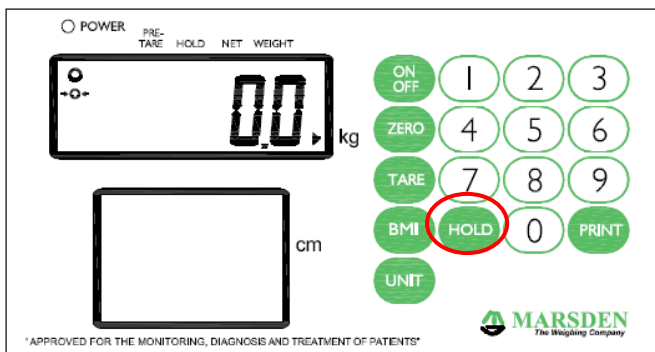


Press the HOLD button once.

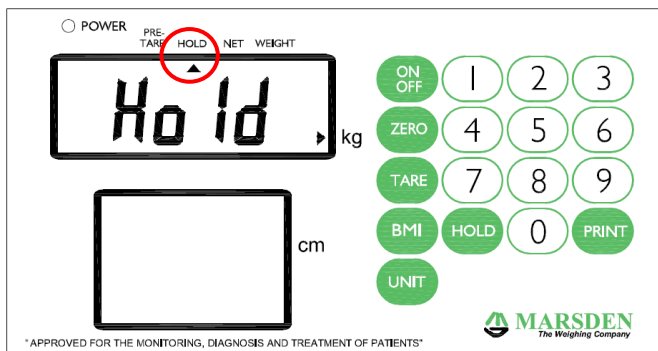

The person should now get on to the scales.

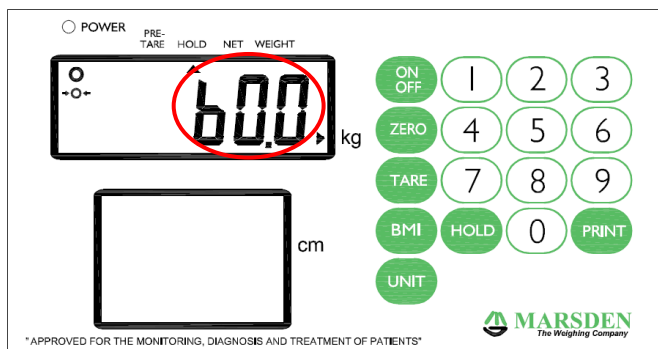


After a few seconds the scale will lock on the person's weight, the person can now stand off the scale and the weight will remain.

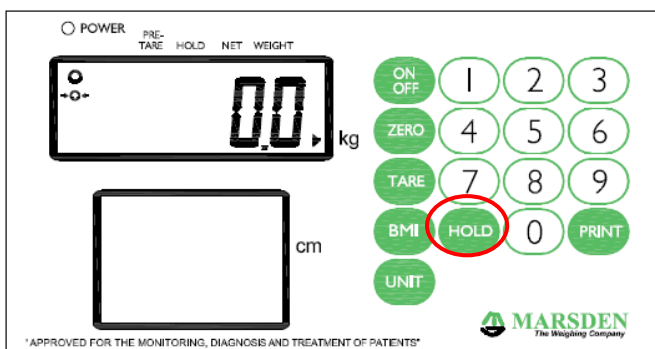


Press HOLD again to unlock the weight and return to 0.0kg

## 2.2 BMI (Body Mass Index) Function


For this example we will assume we have a person weighing 60kg who is 170.0cm tall.

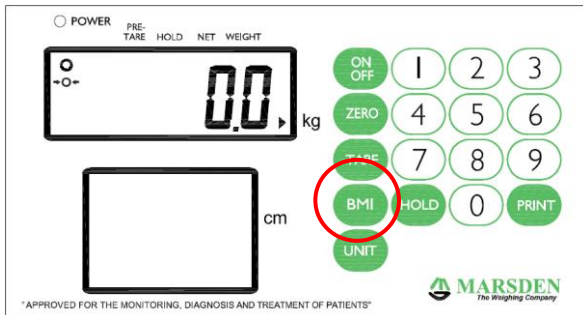

In normal mode, press BMI key to enter into BMI mode.

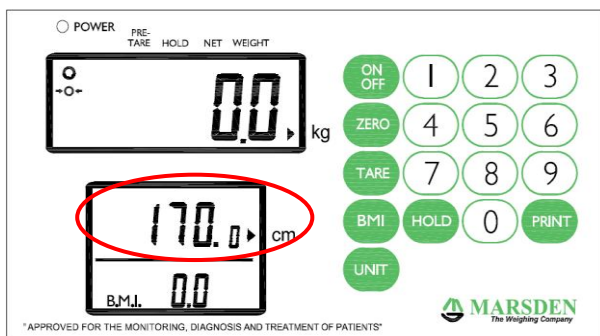


The display will show the last height entered and the extreme left digit will flash. Enter the height by using the numeric key pad (e.g. 170.0cm). There will always be an active flashing digit in the height display (unless the HOLD key is pressed).

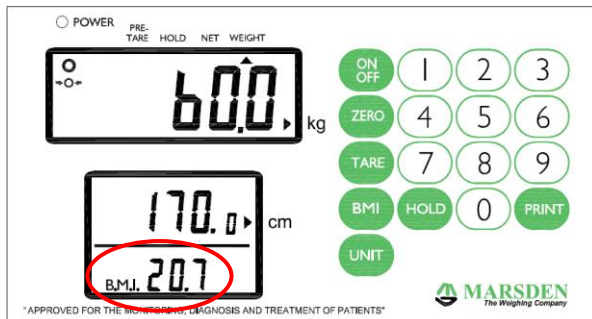

Proceed to weigh as normal. The instrument will show the weight, height, and BMI value.

At this time, the weight and height can be freely changed, and the BMI value will be automatically calculated according to the changed weight and height.

Stand on the scale for 5 seconds. Press the HOLD key to lock the weight, height, and BMI value. Press the HOLD key again to disable the display locking function.

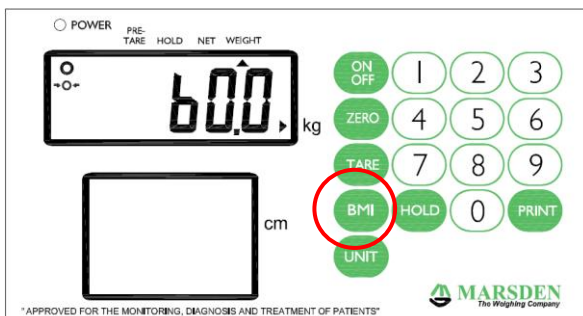





Press the BMI button to return normal mode and the person can now be taken off the scale.

### 2.3 Setting the time and date

Press the HOLD key for 3 seconds to access the time setting mode. The time period digit that is flashing can be changed by entering the appropriate number from the numeric key pad. The time period to be edited is selected by pressing the HOLD key.

E.g. To input 25 December 2008, 8:00 a.m.:

	Enter the year. Press HOLD to confirm and access the date editing field.
	Enter the date. E.g. "12.25" for December 25th. Press HOLD to confirm and access the time clock editing field.
	Enter the time (24 hour clock only).
	Press Hold and the display shows: YYYY→MM.DD→HH:SS



## 2.4 Printing Function

An optional Marsden external printer (Model TP-2100) is available for all models. When the printer is fitted the patient's weight, height, and BMI result can be printed on to a paper roll.

Once the person has been weighed and their BMI calculated, simply press the print key to produce the following ticket:

<b>GROSS WEIGHT</b>	<b>60.00kg</b>
<b>TARE WEIGHT</b>	<b>30.00kg</b>
<b>NET WEIGHT</b>	<b>30.00kg</b>
<b>PATIENT HEIGHT</b>	<b>100.0cm</b>
<b>PATIENT B.M.I</b>	<b>37. 5</b>
<b>29/12/2008 17:00</b>	

## RoHS Compliance

EU Directive 2002/95/EC restrict the use of the 6 substances below in the manufacture of specified types of electrical equipment.

- The product does not contain any of the restricted substances in concentrations and applications banned by the directive;
- and for components, the product is capable of being worked on at higher temperatures required by lead-free soldering.

The restricted substances and maximum allowed concentrations in the homogenous material are, by weight:

<b>Substance</b>	<b>Concentration</b>
Lead	0.1%
Mercury	0.1%
PBB (Polybrominated Biphenyls)	0.1%
PBDE (Polybrominated Diphenyl Ethers)	0.1%
Hexavalant Chromium	0.1%
Cadmium	0.01%

### PRODUCT CONFORMITY

**Harmonised Standards to Which Conformity is Declared –**








**EN60601-1-2 / EN60601-1**

**93/42/EEC – Medical Devices Directive**

**2009/23/EC – Non Automatic Weighing Instrument Directive**

**C € 0120**

## Error Messages

ERROR MESSAGE	REASON	ACTION
	Low battery: This warning shows that the voltage of batteries is too low to use.	Please replace with new batteries or plug the AC adaptor for operation.
	Overload: The total load exceeds the maximum capacity of the scale.	Please reduce the loading and try again.
	Counting error (too high): Indicates that the signal from the load cells is too high.	This error is normally caused by a serious fault on the scales i.e. a faulty load cell or wiring. Please contact the local Service Representative.
	Counting error (too low): Indicates that the signal from the load cells is too low.	This error is normally caused by a serious fault on the scales such as a faulty load cell or wiring. Please contact the local Service Representative.
	Zero count over calibration: Zero range +10% while powered on.	Please re-calibrate the instrument. *1
	Zero count under calibration: Zero range -10% while powered on.	Please re-calibrate the instrument. *1
	EEPROM error: Indicates that there is a fault with the scales software.	This error is normally caused by a serious fault on the scales such as a faulty load cell or wiring. Please contact the local Service Representative.

\*1 - These errors are usually less serious and can be rectified by re-calibration; however they can indicate an underlying problem with the scales. Zero Range is set to 10% of Scale Capacity E.g. Capacity 200.0kg = Zero Range +/-20.0kg



# MARSDEN

ACCURACY ASSURED

<b>Head Office: Sales, Service, Marketing &amp; Accounts</b>	Unit 1 Genesis Business Park Sheffield Road Rotherham S60 1DX
<b>Telephone:</b>	0845 13 0 7330
<b>Fax:</b>	0845 13 0 7440
<b>Despatch, Production &amp; Technical Support</b>	Unit 7 Centurion Business Park Coggin Mill Way Rotherham S60 1FB
<b>Telephone:</b>	017093 64296
<b>Fax:</b>	017093 64293