


MKL-V Floor Scales

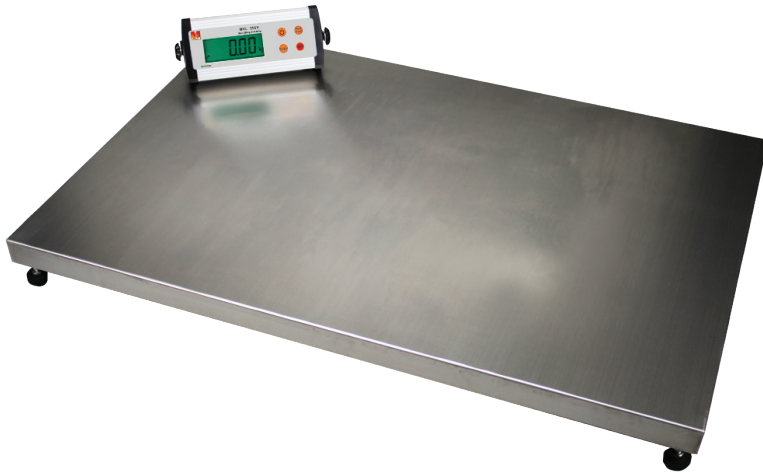

MKL 250V floor scales feature a durable, easy-to-clean stainless steel platform that can accommodate various animals. A non-slip rubber mat is included for comfort and stability. The hold function freezes results on the display, so the animal can be taken off the scale without losing the results. Selectable digital filtering can minimize external influences on the scale for precise readings of moving subjects. The MKL 250V is intuitive, with four buttons on a splash-proof keypad. The bright LCD display is clearly visible in most lighting conditions. These scales offer rugged construction and simple operation for veterinarians.

Features

- External calibration allows for verification and adjustment with weights
- Programmable auto power-off to save energy
- Hold function freezes the displayed weight, allowing time to elapse without losing the result
- Large, grade 304 stainless steel pan allows swift cleaning
- Vivid, backlit LCD easily visible in any lighting conditions
- Adjustable leveling feet help optimize setup
- Low-battery indicator alerts users when the battery needs recharging
- Programmable backlight can be set to “always on,” “always off” or “light only when weighing”
- Selectable digital filtering for animal/dynamic weighing enables consistent results for moving subjects
- Zero-tracking feature ensures display returns to zero reading
- Sealed keypad protects against dirt and spills

Applications

- Weighing
- Dynamic / Animal Weighing

Model	MKL 250V
Maximum Capacity	250kg
Readability	50g
Repeatability (sd)	100g
Linearity	100g
Pan size	900x550mm
Weighing units	g, kg, lb, lb:oz, oz
Stabilisation time (sec)	2-3
Calibration	Automatic External calibration
Display	Backlit LCD with 25mm high digits
Power supply	External power adaptor 12 VDC 800 mA 230V / Internal rechargeable battery
Operating temperature	0° to 40°C / 32° to 104°F
Housing	Aluminium Indicator / Mild Steel Base / Stainless Steel Weighing Pan
Overall Dim.	900 x 550 x 50mm
Net weight	14kg